

HIKVISION[®]

H.265+

H.265

H.264+

H.264

TURBO HD 4.0



4K AND H.265+,
A NEW REVOLUTION
FOR THE ANALOG WORLD.
TURBO HD 4.0 SOLUTION




MORE DETAILS WIDER COVERAGE

Analog video surveillance systems have dominated the security industry for more than forty years. It's about time for a new revolution.

Hikvision introduced its first Turbo HD Solution in 2012, and revolutionized analog security. After years of fine-tuning and perfecting this powerful solution, Hikvision has launched Turbo HD 4.0 – a brand new revolution in high-definition, high-performance surveillance video.


Turbo HD 4.0 technology gives your analog security system the powerful boost yet, upgrading the total system to amazing ultra-HD 4K resolution. Bandwidth efficiency improves by 75% using H.265+ compression. And By transmitting both HD video and power over the same coaxial cable, PoC technology ensures installations are faster, simpler, and less expensive.

Give your analog surveillance system a big—BIG!—step up in power and performance with Hikvision's Turbo HD 4.0. In this brochure, we will show you how.

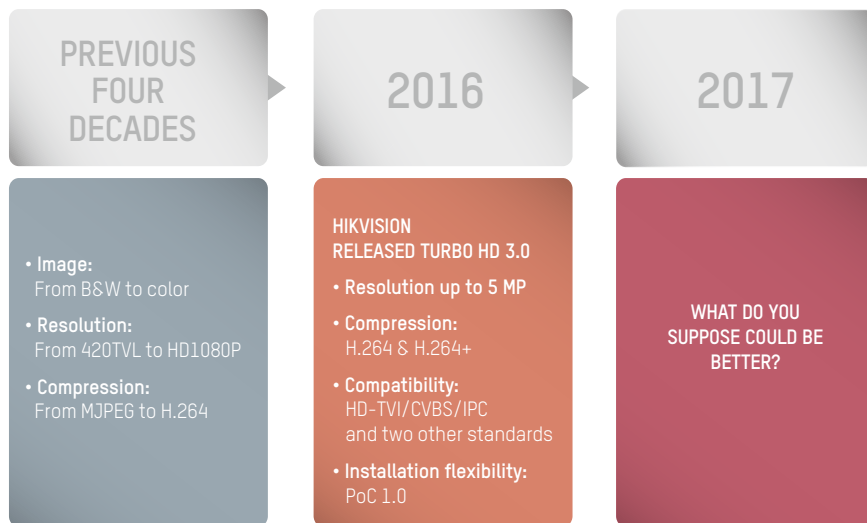



HISTORY





Ultra HD
01

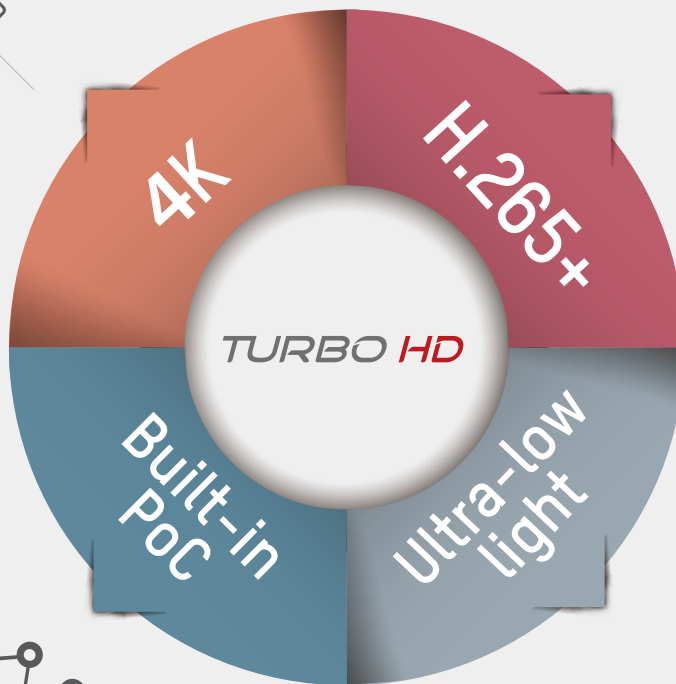
Supreme Compression
02




Simpler Than Ever System
04


Chromatic Night Vision
03

01 4K ULTRA HD

Sharp, precise, clear video can make all the difference in critical surveillance situations, enabling security staff to quickly identify suspicious individuals, objects, and movement, and take the right action at the right time.

While most analog cameras offer only 2 MP resolution, Hikvision's Turbo HD 4.0 Cameras provide ultra-HD resolution up to 4K, resulting in superlative image quality. The latest 4K cameras offer an astounding 8-Megapixel resolution. With wider coverage and more details, 8 MP cameras reduce the blind areas efficiently. A complete, ultra-HD system can be secured from front-end 4K cameras to back-end 4K DVR and 4K HDMI monitors.


End-to-End 4K Solution



02 H.265+ SUPREME COMPRESSION

More than three years of research and accumulation empowered Hikvision to be the first to release H.265+ on an analog system—a revolution for analog. H.265+ takes a huge step up in efficiency over H.264—reducing bitrates by 75% on average while maintaining high transmission quality.

H.265+ compression technology takes analog even further. Based on the H.265/HEVC codec, H.265+ is an intelligent algorithm developed by Hikvision that can greatly decrease the bitrate of video. Bandwidth is radically reduced, storage requirements are minimized, and image quality improved.

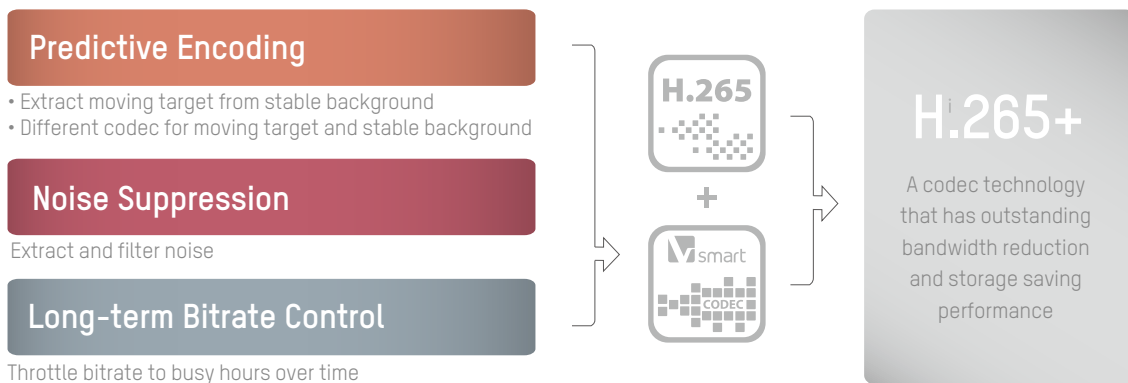

What's more, Hikvision launches the upgraded encoding technique -- H.265 Pro. Compared with H.265, H.265 Pro can reduce video file size by 50% on average. And when combine H.265 Pro with Hikvision's unique H.265+ technology, the newly generated H.265 Pro+ is more powerful on encoding compression and can help reduce video file size by up to 75% and even more.

03 Ultra-low Light CHROMATIC NIGHT VISION

Ultra-low illumination cameras from Hikvision vastly improve the efficiency of night monitoring. High-definition 1080p displays come to life with the amazing ultra-low illumination surveillance cameras. With 120 dB WDR and built-in PoC function, these cameras offer users the most advanced security features available. Rest assured that you will see what's really there—in the shadows, at night, and under conditions that leave other cameras in the dark.



Conventional
HD 1080p Camera

Turbo HD 4.0 Camera
(0.003 lux)



Conventional
HD 1080p Camera

Turbo HD 4.0 Camera
(0.003 lux)

04 Built-in PoC SIMPLER THAN EVER SYSTEM

With Hikvision's Turbo HD 4.0 Solution, installers don't have to pull wire. Power-over-coax (PoC) supplies the technology to use coaxial cable to integrate video and DC power. This innovation consists of a front-end PoC camera and a back-end Turbo HD DVR, directly embedding the PoC power supply into the back-end DVR device. It then transmits the video signal through the coaxial cable and solves the power supply problem for front-end equipment. Turbo HD 4.0 Solutions reduce the wiring area, save space, and reduce the costs of labor.

► **Conventional Transmission:**
Camera requires an external power source to function



► **Built-in PoC: One Cable Solution**

- Transmits both HD video and power over the same coaxial cable
- Faster, simpler, and less expensive installations
- Patented Hikvision technology



PRODUCT FEATURES

Turbo HD 4.0 PTZ



DS-2AE7232TI-A
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080 resolution
- 32× optical zoom, 16× digital zoom 120 dB true WDR (Wide Dynamic Range)
- Up to 150 m IR distance
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video outputs



DS-2AE7225TI-A
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080 resolution
- 25× optical zoom, 16× digital zoom 120 dB true WDR (Wide Dynamic Range)
- Up to 150 m IR distance
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video outputs



DS-2AE5232TI-A
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080 resolution
- 32× optical zoom, 16× digital zoom
- 120 dB true WDR (Wide Dynamic Range)
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video outputs



DS-2AE5225TI-A HOT
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080 resolution
- 25× optical zoom, 16× digital zoom
- 120 dB true WDR (Wide Dynamic Range)
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video outputs



DS-2AE5232T-A
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080 resolution
- 32× optical zoom, 16× digital zoom
- 120 dB true WDR (Wide Dynamic Range)
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video outputs



DS-2AE5225T-A
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080 resolution
- 25× optical zoom, 16× digital zoom
- 120 dB true WDR (Wide Dynamic Range)
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video outputs



DS-2AE5232T-A3
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080 resolution
- 32× optical zoom, 16× digital zoom
- 120 dB true WDR (Wide Dynamic Range)
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video outputs



DS-2AE5225T-A3
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080 resolution
- 25× optical zoom, 16× digital zoom
- 120 dB true WDR (Wide Dynamic Range)
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video outputs

PRODUCT FEATURES



DS-2AE4225TI-D HOT
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080 resolution
- 25× optical zoom, 16× digital zoom
- 120 dB true WDR (Wide Dynamic Range)
- Up to 100 m IR distance
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video outputs



DS-2AE4215TI-D
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080 resolution
- 15× optical zoom
- DWDR (Digital Wide Dynamic Range)
- Up to 100 m IR distance
- 3D intelligent positioning
- Switchable Turbo HD and CVBS outputs



DS-2AE4225T-D
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080 resolution
- 25× optical zoom, 16× digital zoom
- 120 dB true WDR (Wide Dynamic Range)
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video outputs



DS-2AE4215T-D
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080
- 15× optical zoom, 16× digital zoom
- 120 dB true WDR (Wide Dynamic Range)
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video outputs



DS-2AE5232T-A
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080 resolution
- 25× optical zoom, 16× digital zoom
- 120 dB true WDR (Wide Dynamic Range)
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video outputs



DS-2AE5225T-A
HD 1080p Analog PTZ

- 1/2.8" HD progressive scan CMOS
- 1920 × 1080
- 15× optical zoom, 16× digital zoom
- 120 dB true WDR (Wide Dynamic Range)
- 3D intelligent positioning
- Switchable TVI/AHD/CVI/CVBS video outputs

Turbo HD 4.0 CAMERA - Ultra Series



DS-2CE17U8T-IT NEW
4K Ultra-Low Light
Bullet Camera

- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 40 m
- IP67
- 12 VDC



DS-2CE18U8T-IT3 NEW
4K Ultra-Low Light
Bullet Camera

- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67
- 12 VDC

PRODUCT FEATURES



NEW
DS-2CE57U8T-VPIT
 4K Ultra-Low Light
 Dome Camera

- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 40 m
- IP67, IK10
- 12 VDC



NEW
DS-2CE78U8T-IT3
 4K Ultra-Low Light
 Turret Camera

- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67
- 12 VDC



NEW
DS-2CE19U8T-(A)IT3Z
 4K Ultra-Low Light VF
 Bullet Camera

- 2.8 mm to 12 mm motorized auto focus lens
- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 80 m
- IP67
- 12 VDC, -A model: 24VAC, 12VDC



NEW
DS-2CE37U8T-A
 4K Ultra-Low Light
 Box Camera

- C/CS
- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- 12 VDC, 24 VAC



NEW
DS-2CE59U8T-(A)VPIT3Z
 4K Ultra-Low Light
 Dome Camera

- 2.8 mm to 12 mm motorized auto focus lens
- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67, IK10
- 12 VDC, -A model: 24VAC, 12VDC



NEW
DS-2CE79U8T-IT3Z
 4K Ultra-Low Light
 Turret Camera

- 2.8 mm to 12 mm motorized auto focus lens
- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 80 m
- IP67
- 12 VDC



DS-2CC12D9T-(A)
 HD 1080p Ultra-Low
 Light Box Camera

- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- 12 VDC, -A model: 24VAC, 12VDC



DS-2CE16D9T-AIRAZH
 HD 1080p Ultra-Low
 Light VF EXIR Bullet
 Camera

- 5-50mm, auto focus, auto iris
- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 110 m
- IP66
- 24VAC, 12 VDC, Heater is available with 24VAC only

PRODUCT FEATURES



DS-2CC12D9T-E
4K Ultra-Low Light
Dome Camera

- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- 12 VDC, PoC.at



DS-2CC12D9T-IT3/5E
4K Ultra-Low Light
Turret Camera

- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 40/80 m
- IP67
- 12 VDC, PoC.af



DS-2CC52D9T-IT3E
HD 1080p Ultra Low
Light PoC Turret Camera

- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 40m
- IP67
- 12 VDC, PoC.af



DS-2CC12D9T-AIT3ZE
HD 1080p Ultra Low Light
VF PoC Bullet Camera

- 2.8 mm to 12 mm, auto focus, auto iris
- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 40m
- IP67
- 24 VAC, 12 VDC, PoC.at



DS-2CC52D9T-AITZE
HD 1080p Ultra Low Light VF
PoC Dome Camera

- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- 12 VDC, -A model: 24VAC, 12VDC



DS-2CC52D9T-AVPIT3ZE
HD 1080p Ultra Low Light
VF PoC Dome Camera

- 5-50mm, auto focus, auto iris
- 1 HD output & 1 SD output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 110 m
- IP66
- 24VAC, 12 VDC, Heater is available with 24VAC only



NEW
DS-2CE16U7T-ITF
DS-2CE16U7T-IT3F
4K Ultra-Low Light
Bullet Camera

- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30/60 m
- IP67
- 12 VDC



NEW
DS-2CE57U7T-VPITF
4K Ultra-Low Light
Dome Camera

- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30 m
- IP67, IK10
- 12 VDC

PRODUCT FEATURES



NEW

DS-2CE76U7T-ITMF
DS-2CE78U7T-IT3F
 4K Ultra-Low Light
 Turret Camera

- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30/60 m
- IP67
- 12 VDC



NEW

DS-2CE19U7T-(A)IT3ZF
 4K Ultra-Low Light VF
 Bullet Camera

- 2.7 mm to 13.5 mm motorized auto focus lens
- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 80 m
- IP67
- 9 VDC to 15 VDC;
 -A model: 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC



NEW

DS-2CE59U7T-(A)VPIT3ZF
DS-2CE5AU7T-(A)VPIT3ZF
 4K Ultra-Low Light VF Dome
 Camera

- 2.7 mm to 13.5 mm motorized auto focus lens
- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67, IK10
- 9 VDC to 15 VDC;
 -A model: 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC



NEW

DS-2CE79U7T-IT3ZF
 4K Ultra-Low Light VF
 Turret Camera

- 2.7 mm to 13.5 mm motorized auto focus lens
- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67
- 12 VDC

Pro Series



NEW

DS-2CE16H8T-ITF
DS-2CE16H8T-IT1/3/5F
 5 MP Ultra-Low Light Bullet
 Camera

- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30/30/60/80 m
- IP67
- 12 VDC



NEW

DS-2CE57H8T-VPITF
 5 MP Ultra-Low Light
 Dome Camera

- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30 m
- IP67, IK10
- 12 VDC



NEW

DS-2CE76H8T-ITMF
DS-2CE78H8T-IT1/3F
 5 MP Ultra-Low Light
 Turret Camera

- 4 in 1 output
- 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 30/30/60 m
- IP67
- 12 VDC



NEW

DS-2CE19H8T-(A)IT3ZF
 5 MP Ultra-Low Light
 VF Bullet Camera

- 2.7 mm to 13.5 mm motorized auto focus lens
- 4 in 1 output
- 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 60 m
- IP67
- 9 VDC to 15 VDC;
 -A model: 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC

PRODUCT FEATURES



NEW
DS-2CE56H8T-(A)ITZF
 5 MP Ultra-Low Light VF
 Dome Camera

- 2.7 mm to 13.5 mm motorized auto focus lens
- 4 in 1 output
- 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 60 m
- IP67
- 9 VDC to 15 VDC;
 -A model: 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC



NEW
DS-2CE59H8T-(A)VPIT3ZF
DS-2CE5AH8T-(A)VPIT3ZF
 5 MP Ultra-Low Light VF
 Dome Camera

- 2.7 mm to 13.5 mm motorized auto focus lens
- 4 in 1 output
- 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 60 m
- IP67, IK10
- 9 VDC to 15 VDC;
 -A model: 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC



NEW
DS-2CE79H8T-IT3ZF
 5 MP Ultra-Low Light VF
 Turret Camera

- 2.7 mm to 13.5 mm motorized auto focus lens
- 4 in 1 output
- 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 60 m
- IP67
- 9 VDC to 15 VDC



DS-2CC12D8T-AMM
 HD 1080p Ultra-Low
 Light Box Camera

- 1 HD analog output
- Ultra low illumination 0.005 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- 12 VDC, 24 VAC



DS-2CE16D8T-ITPF
DS-2CE16D8T-ITF
 HD 1080p Ultra-Low Light
 EXIR Bullet Camera

- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30 m
- IP67
- 12 VDC



DS-2CE16D8T-IT1/3/5F
 HD 1080p Ultra-Low Light
 EXIR Bullet Camera

- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30/60/80 m
- IP67
- 12 VDC



DS-2CE56D8T-VPITF
 HD 1080p Ultra-Low Light
 Dome Camera

- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30 m
- IP67, IK10
- 12 VDC



DS-2CE56D8T-IRS
 HD 1080p Ultra-Low Light
 Dome Camera

- 4 in 1 output
- Ultra low illumination 0.005 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 20 m
- 12 VDC



DS-2CE56D8T-ITMF **HOT**
DS-2CE56D8T-IT1/3F
 HD 1080p Ultra-Low Light Turret Camera

- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30/30/60 m
- IP67
- 12 VDC



DS-2CE16D8T-(A)IT3ZF
 HD 1080p Ultra-Low Light VF Bullet Camera

- 2.8 mm to 12 mm motorized auto focus lens
- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67
- 12 VDC;
- -A model:12VDC; 24VAC



DS-2CE56D8T-(A)IT3ZF
 HD 1080p Ultra-Low Light ZF EXIR Dome Camera

- 2.8 mm to 12 mm motorized auto focus lens
- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- 12 VDC;
- -A model:12VDC; 24VAC



DS-2CE56D8T-(A)VPIT3ZF
DS-2CE5AD8T-(A)VPIT3ZF
 HD 1080p Ultra-Low Light VF Dome Camera

- 2.8 mm to 12 mm motorized auto focus lens
- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67,IK10
- 12 VDC;
- -A model:12VDC; 24VAC



DS-2CE56D8T-IT3ZF **HOT**
 HD 1080p Ultra-Low Light VF Turret Camera

- 2.8 mm to 12 mm motorized auto focus lens
- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67
- 12 VDC



DS-2CE16D8T-ITE **HOT**
DS-2CE16D8T-IT1/3/5E
 HD 1080p Ultra-Low Light PoC EXIR Bullet Camera

- 1 HD analog output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30/30/60/80 m
- IP67
- ITE,IT1/3E models: 12 VDC, PoC.af
- IT5E models: 12 VDC, PoC.at



DS-2CE56D8T-VPITE
 HD 1080p Ultra-Low Light PoC Dome Camera

- 1 HD analog output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30 m
- IP67, IK10
- 12 VDC, PoC.af



DS-2CE56D8T-ITME **HOT**
DS-2CE56D8T-IT1/3E
 HD 1080p Ultra-Low Light PoC Turret Camera

- 1 HD analog output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30/30/60 m
- IP67
- 12 VDC, PoC.af



DS-2CE16D8T-IT3ZE
 HD 1080p Ultra-Low Light
 VF PoC Bullet Camera

- 2.8 mm to 12 mm motorized auto focus lens
- 1 HD analog output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67
- 12 VDC, PoC.at



DS-2CE56D8T-IT3ZE
 HD 1080p Ultra-Low Light
 VF PoC Turret Camera

- 2.8 mm to 12 mm motorized auto focus lens
- 1 HD analog output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67
- 12 VDC, PoC.at



DS-2CE56D8T-ITZE
 HD 1080p Ultra-Low Light
 VF PoC EXIR Dome Camera

- 2.8 mm to 12 mm motorized auto focus lens
- 1 HD analog output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30 m
- IP50
- 12 VDC, PoC.at



DS-2CE56D8T-VPIT3ZE
DS-2CE5AD8T-VPIT3ZE
 HD 1080p Ultra-Low Light
 VF PoC Dome Camera

- 2.8 mm to 12 mm motorized auto focus lens
- 1 HD analog output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67, IK10
- 12 VDC, PoC.af

Value Series



DS-2CE16U1T-ITF
DS-2CE16U1T-ITPF
 4K Bullet Camera

NEW

- 4 in 1 output
- 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 30 m
- IP67
- 12 VDC



DS-2CE16U1T-IT1/3/5F
 4K Bullet Camera

NEW

- 4 in 1 output
- 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 30/60/80 m
- IP67
- 12 VDC



DS-2CE57U1T-VPITF
 4K Dome Camera

NEW

- 4 in 1 output
- 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 30 m
- IP67, IK10
- 12 VDC



DS-2CE76U1T-ITPF
 4K Indoor turret Camera

NEW

- 4 in 1 output
- 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 30 m
- 12 VDC

PRODUCT FEATURES



NEW

DS-2CE76U1T-ITMF
DS-2CE78U1T-IT1/3F
4K Turret Camera

- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 30/30/60 m
- IP67
- 12 VDC



NEW

DS-2CE19U1T-(A)IT3ZF
4K Bullet Camera

- 2.7 mm to 13.5 mm motorized auto focus lens
- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 80 m
- IP67
- 9 VDC to 15 VDC, -A model: 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC



NEW

DS-2CE56U1T-(A)ITZF
4K Dome Camera

- 2.7 mm to 13.5 mm motorized auto focus lens
- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67
- 9 VDC to 15 VDC, -A model: 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC



NEW

DS-2CE59U1T-(A)VPIT3ZF
DS-2CE5AU1T-(A)VPIT3ZF
4K Dome Camera

- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67, IK10
- 9 VDC to 15 VDC, -A model: 9.6 VDC to 14.4 VDC; 19.2 VAC to 28.8 VAC



NEW

DS-2CE79U1T-IT3ZF
4K Turret Camera

- 4 in 1 output
- Ultra low illumination 0.003 Lux / F1.2
- True WDR, 3D DNR, Smart IR
- Up to IR 60 m
- IP67
- 9 VDC to 15 VDC



HOT

DS-2CE16HOT-ITPF
DS-2CE16HOT-ITF
5 MP Bullet Camera

- 4 in 1 output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 20 m
- IP67
- 12 VDC



DS-2CE16HOT-IT1/3/5F
5 MP Bullet Camera

- 4 in 1 output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 20/40/80 m
- IP67
- 12 VDC



HOT

DS-2CE56HOT-VPITF
5 MP Dome Camera

- 4 in 1 output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 20 m
- IP67, IK10
- 12 VDC

PRODUCT FEATURES



HOT
DS-2CE56H0T-ITPF
 5 MP Indoor Turret Camera

- 4 in 1 output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 20 m
- IP67
- 12 VDC



DS-2CE56H0T-ITMF
DS-2CE56H0T-IT1/3F
 5 MP Turret Camera

- 4 in 1 output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 20/20/40 m
- IP67
- 12 VDC



HOT
DS-2CE16H0T-(A)IT3ZF
 5 MP VF Bullet Camera

- 2.7 mm to 13.5 mm motorized vari-focal lens
- 4 in 1 output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 40m
- IP67
- 12 VDC;
- A model: 12 VDC, 24 VAC



HOT
DS-2CE56H0T-(A)VPIT3ZF
DS-2CE5AH0T-(A)VPIT3ZF
 5 MP Dome Camera

- 2.7 mm to 13.5 mm motorized vari-focal lens
- 4 in 1 output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 40 m
- IP67, IK10
- 12 VDC;
- A model: 12 VDC, 24 VAC



DS-2CE56H0T-(A)ITZF
 5 MP Dome Camera

- 2.7 mm to 13.5 mm motorized vari-focal lens
- 4 in 1 output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 20 m
- 12 VDC;
- A model: 12 VDC, 24 VAC



HOT
DS-2CE56H0T-IT3ZF
 5 MP VF Turret Camera

- 2.7 mm to 13.5 mm motorized vari-focal lens
- 4 in 1 output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 40 m
- IP67
- 12 VDC



DS-2CE16H0T-ITE
DS-2CE16H0T-IT1/3/5E
 5 MP Bullet Camera

- 1 HD analog output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 20/20/40/80 m
- IP67
- ITE,IT1/3E models: 12 VDC, PoC.af
- 5E model: 12 VDC, PoC.at



DS-2CE56H0T-VPITE
 5 MP Dome Camera

- 1 HD analog output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 20 m
- IP67, IK10
- 12 VDC, PoC.af

PRODUCT FEATURES



DS-2CE56H0T-ITME
DS-2CE56H0T-IT1/3E
5 MP Turret Camera

- 1 HD analog output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 20/20/40 m
- IP67
- 12 VDC, PoC.af



DS-2CE16H0T-IT3ZE
5 MP VF Bullet Camera

- 2.7 mm to 13.5 mm motorized vari-focal lens
- 1 HD analog output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 40 m
- IP67
- 12 VDC, PoC.at



DS-2CE56H0T-ITZE
5 MP VF Dome Camera

- 2.7 mm to 13.5 mm motorized vari-focal lens
- 1 HD analog output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 20 m
- IP67
- 12 VDC, PoC.af



DS-2CE56H0T-VPIT3ZE
DS-2CE5AH0T-VPIT3ZE
5 MP VF Dome Camera

- 2.7 mm to 13.5 mm motorized vari-focal lens
- 1 HD analog output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 20/40/40 m
- IP67, IK10
- 12 VDC, PoC.af



DS-2CE56H0T-IT3ZE
5 MP VF Turret Camera

- 2.7 mm to 13.5 mm motorized vari-focal lens
- 1 HD analog output
- DWDR, 2D DNR, Smart IR
- 0.01 Lux / F1.2
- Up to IR 40 m
- IP67
- 12 VDC, PoC.at



DS-2CE16D0T-IRP
DS-2CE16D0T-IR
HD 1080p IR Bullet Camera

- 1 HD analog output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20m
- IP66
- 12 VDC



DS-2CE16D0T-IT1/3/5
HD 1080p EXIR Bullet Camera

- 1 analog HD output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20/40/80m
- IP66
- 12 VDC



DS-2CE16D0T-WL3
HD 1080p White Supplement Light Bullet Camera

- 1 analog HD output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR
- White light distance up to 30/50 m
- IP66
- 12 VDC

PRODUCT FEATURES



DS-2CE56D0T-IRMM
HD 1080p Indoor IR
Dome Camera

- 1 analog HD output
- Illumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20m
- IP66
- 12 VDC



DS-2CE56D0T-VP1R3F
DS-2CE5AD0T-VP1T3F
HD 1080p Vandal Proof VF
Dome Camera

- 4 in 1 output
- Illumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 40 m
- IP67, IK10
- 12 VDC



DS-2CE56D0T-IR
DS-2CE56D0T-IRM
HD 1080p IR Turret
Camera

- 1 analog HD output
- Illumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20m
- IP66
- 12 VDC



DS-2CE56D0T-IT1/3
HD 1080p EXIR Turret
Camera

- 1 analog HD output
- Illumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20/40 m
- IP66
- 12 VDC



DS-2CE16D0T-IRPE
DS-2CE16D0T-IRE
HD 1080p Vandal Proof PoC
Dome Camera

- 1 HD analog output
- Illumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20m
- IP66
- 12 VDC, PoC.af



DS-2CE16D0T-IT1/3/5E
HD 1080p PoC EXIR Turret
Camera

- 1 HD analog output
- Illumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20/40/80m
- IP66
- 12 VDC, PoC.af



DS-2CE56D0T-VP1R3E
5 MP Bullet Camera

- 1 analog HD output
- Illumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 40 m
- IP66
- 12 VDC, PoC.af



DS-2CE56D0T-IT1/3E
5 MP Dome Camera

- 1 analog HD output
- Illumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20/40m
- IP66
- 12 VDC, PoC.af

PRODUCT FEATURES



DS-2CE16D0T-VFIR3E
 HD 1080p VF PoC
 Bullet Camera

- 2.8 mm to 12 mm vari-focal lens
- 1 analog HD output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 40 m
- IP66
- 12 VDC, PoC.at



DS-2CE56D0T-VFIR3E
 HD 1080p VFI PoC
 Turret Camera

- 2.8 mm to 12 mm vari-focal lens
- 1 analog HD output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 40 m
- IP66
- 12 VDC, PoC.at



DS-2CE56D0T-VFIRE
 HD 1080p VF PoC Dome
 Camera

- 2.8 mm to 12 mm vari-focal lens
- 1 analog HD output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 30 m
- 12 VDC, PoC.af



DS-2CE16D0T-IRPF
DS-2CE16D0T-IRF
 HD 1080p IR Bullet Camera

- 4 in 1 output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20m
- IP66
- 12 VDC



DS-2CE16D0T-IT1/3/5F
 5 MP VFTurret Camera

- 4 in 1 output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20/40/80m
- IP66
- 12 VDC



DS-2CE56D0T-IRMMF
 HD 1080p IR Bullet
 Camera

- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20m
- 12 VDC



DS-2CE56D0T-VPIR3F
DS-2CE5AD0T-VPIT3F
 HD 1080p EXIR Bullet
 Camera

- 4 in 1 output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 40 m
- IP67,IK10
- 12 VDC



DS-2CE56D0T-IRPF
 HD 1080p Indoor IR Dome
 Camera

- 4 in 1 output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20m
- 12 VDC

PRODUCT FEATURES



DS-2CE56D0T-IRF
DS-2CE56D0T-IRMF
 HD 1080p IR Turret Camera

- 4 in 1 output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20m
- IP66
- 12 VDC



DS-2CE56D0T-IT1/3F
 HD 1080p EXIR Turret Camera

- 4 in 1 output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 20/40m
- IP66
- 12 VDC



DS-2CE16D0T-VFIR3F
 HD 1080p VF Bullet Camera

- 2.8 mm to 12 mm vari-focal lens
- 4 in 1 output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 40 m
- IP66
- 12 VDC



DS-2CE56D0T-VFIR3F
 HD 1080p VF Turret Camera

- 2.8 mm to 12 mm vari-focal lens
- 4 in 1 output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 40 m
- IP66
- 12 VDC



DS-2CE56D0T-VFIRF
 HD 1080p VF Dome Camera

- 2.8 mm to 12 mm vari-focal lens
- 4 in 1 output
- Lllumination 0.01 Lux / F1.2
- DWDR, 2D DNR, Smart IR
- Up to IR 30 m
- IP66
- 12 VDC



DS-2CE16D3T-I3PF **NEW**
DS-2CE16D3T-I3F
 HD 1080p Ultra-Low Light Bullet Camera

- 4 in 1 output
- 0.005Lux
- True WDR, 3D DNR, Smart IR
- Up to IR 20/30 m
- IP67
- 12 VDC



DS-2CE16D3T-ITPF **NEW**
DS-2CE16D3T-ITF
 HD 1080p Ultra-Low Light Bullet Camera

- 4 in 1 output
- 0.005Lux
- True WDR, 3D DNR, Smart IR
- Up to IR 30 m
- IP67
- 12 VDC



DS-2CE16D3T-IT3F **NEW**
 HD 1080p Ultra-Low Light Bullet Camera

- 4 in 1 output
- 0.005Lux
- True WDR, 3D DNR, Smart IR
- Up to IR 50 m
- IP67
- 12 VDC

PRODUCT FEATURES



NEW

DS-2CE57D3T-VPITF
HD 1080p Ultra-Low Light Dome Camera

- 4 in 1 output
- 0.005Lux
- True WDR, 3D DNR, Smart IR
- Up to IR 30 m
- IP67, IK10
- 12 VDC



NEW

DS-2CE76D3T-ITMF
HD 1080p Ultra-Low Light Turret Camera

- 4 in 1 output
- 0.005Lux
- True WDR, 3D DNR, Smart IR
- Up to IR 30 m
- IP67
- 12 VDC



NEW

DS-2CE78D3T-IT3F
HD 1080p Ultra-Low Light Turret Camera

- 4 in 1 output
- 0.005Lux
- True WDR, 3D DNR, Smart IR
- Up to IR 50 m
- IP67
- 12 VDC



NEW

DS-2CE19D3T-(A)IT3ZF
HD 1080p Ultra-Low Light VF Bullet Camera

- 2.7 mm to 13.5 mm motorized auto focus lens
- 4 in 1 output
- 0.005Lux
- True WDR, 3D DNR, Smart IR
- Up to IR 70 m
- IP67
- 12VDC
- A model: 24 VAC, 12 VDC



NEW

DS-2CE79D3T-IT3ZF
HD 1080p Ultra-Low Light VF Turret Camera

- 2.7 mm to 13.5 mm motorized auto focus lens
- 4 in 1 output
- 0.005Lux
- True WDR, 3D DNR, Smart IR
- Up to IR 70 m
- IP67
- 12 VDC



NEW

DS-2CE5AD3T-(A)VPIT3ZF
HD 1080p Ultra-Low Light VF Dome Camera

- 2.7 mm to 13.5 mm motorized auto focus lens
- 4 in 1 output
- 0.005Lux
- True WDR, 3D DNR, Smart IR
- Up to IR 70 m
- IP67, IK10
- 12VDC
- A model: 24 VAC, 12 VDC

Turbo HD 4.0 DVR - Ultra Series



DS-9008/16/24/32HUHI-K8
5 MP 2U Turbo HD DVR

- 8/16/24/32-ch analog video input, 8/16/16/16-ch audio input
- HDTV/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 18/34/48/64-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 8 MP@8fps, 5 MP@12fps, 4 MP@ 15fps
- HDMI output at 4K resolution
- 8 SATA X 10 TB, 1 eSATA X 10 TB; 2 × USB 2.0, 1 × USB 3.0



NEW

DS-8108/16/24/32HUHI-K8
5 MP 2U Turbo HD DVR

- 8/16/24/32-ch analog video input, 8/16/16/16-ch audio input
- HDTV/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 16/32/40/48-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 8 MP@8fps, 5 MP@12fps, 4 MP@ 15fps
- HDMI output at 4K resolution
- 8 SATA X 10 TB, 1 eSATA X 10 TB; 2 × USB 2.0, 1 × USB 3.0

PRODUCT FEATURES



NEW

DS-8108/16/24/32HQHI-K8
HD 1080p 2U Turbo HD DVR

- 8/16/24/32-ch analog video input, 8/16/16/16-ch audio input
- HDTV/HD/CVI/AVBS/IP video signal supported, IP camera access up to 12/24/40/48-ch
- H.265Pro+/H.265Pro/H.265/H.264+/H.264 video compression
- 4 MP lite@15fps, 3 MP@15fps, 1080p@15fps
- HDMI output at 4K resolution
- 8 SATA X 10 TB, 1 eSATA X 10 TB; 2 × USB 2.0, 1 × USB 3.0

Pro Series



DS-7204HTHI-K1
8 MP 1U Turbo HD DVR

- 4-ch analog video input, 4-ch audio input
- HDTV/HD/CVI/AVBS/IP video signal supported, IP camera access up to 8-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 8 MP@12fps, 5 MP@20fps
- HDMI output at 4K resolution
- 1 SATA X 10 TB; 1 × USB 2.0, 1 × USB 3.0



DS-7204/08HTHI-K2
8 MP 1U Turbo HD DVR

- 4/8-ch analog video input, 4-ch audio input
- HDTV/HD/CVI/AVBS/IP video signal supported, IP camera access up to 8/16-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 8 MP@12fps, 5 MP@20fps
- HDMI output at 4K resolution
- 2 SATA X 10 TB; 1 × USB 2.0, 1 × USB 3.0

HOT



DS-7204/08HUHI-K1
5 MP 1U Turbo HD DVR

- 4/8-ch analog video input, 1-ch audio input
- HDTV/HD/CVI/AVBS/IP video signal supported, IP camera access up to 8/16-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 8 MP@8fps (DS-7208HUHI-K1), 5 MP@12fps, 4 MP@15fps
- HDMI output at 4K resolution (DS-7208HUHI-K1)
- 1 SATA X 10 TB; 1 × USB 2.0, 1 × USB 3.0 (DS-7208HUHI-K1)



HOT

DS-7204/08/16HUHI-K2
5 MP 1U Turbo HD DVR

- 4/8/16-ch analog video input, 1-ch audio input
- HDTV/HD/CVI/AVBS/IP video signal supported, IP camera access up to 8/16/32-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 8 MP@8fps (DS-7208/16HUHI-K2), 5 MP@12fps, 4 MP@15fps
- HDMI output at 4K resolution (DS-7208/16HUHI-K2)
- 2 SATA X 10 TB; 1 × USB 2.0, 1 × USB 3.0 (DS-7208/16HUHI-K2)

PoC



DS-7204HUHI-K1/P
5 MP 1U Turbo HD PoC DVR

- 4-ch analog video input, 4-ch audio input
- HDTV/HD/CVI/AVBS/IP video signal supported, IP camera access up to 8-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 5 MP@12fps, 4 MP@15fps
- HDMI and VGA output at up to 1920 x 1080p resolution
- 1 SATA X 10 TB; 2 × USB 2.0



PoC

DS-7208/16HUHI-K2/P
5 MP 1U Turbo HD PoC DVR

- 8/16-ch analog video input, 4-ch audio input
- HDTV/HD/CVI/AVBS/IP video signal supported, IP camera access up to 16/32-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 8 MP@8fps, 5 MP@12fps, 4 MP@15fps
- HDMI output at 4K resolution
- 2 SATA X 10 TB; 1 × USB 2.0, 1 × USB 3.0



DS-7304/08/16/24/32HUHI-K4
5 MP 1.5U Turbo HD DVR

- 4/8/16/24/32-ch analog video input, 4-ch audio input
- HDTV/HD/CVI/AVBS/IP video signal supported, IP camera access up to 8/16/32/40/48-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 8 MP@8fps, 5 MP@12fps, 4 MP@15fps
- HDMI output at 4K resolution
- 4 SATA X 10 TB, 1 eSATA X 10 TB; 2 × USB 2.0; 1 × USB 3.0

PRODUCT FEATURES



HOT
DS-7204/08/16HQHI-K1
 HD 1080p 1U Turbo HD DVR

- 4/8/16-ch analog video input, 1-ch audio input
- HDTV/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 6/12/24-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 4 MP lite@15fps, 3 MP@15fps, 1080p@15fps
- HDMI output at 4K resolution (DS-7216HQHI-K1)
- 1 SATA X 10 TB; 1 × USB 2.0, 1 × USB 3.0 (DS-7216HQHI-K1)



HOT
DS-7208/16/24/32HQHI-K2
 HD 1080p 1U Turbo HD DVR

- 8/16/24/32-ch analog video input, 1-ch audio input
- HDTV/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 12/24/32/40-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 4 MP lite@15fps, 3 MP@15fps, 1080p@15fps
- HDMI output at 4K resolution (DS-7216/24/32HQHI-K2)
- 2 SATA X 10 TB; 1 × USB 2.0, 1 × USB 3.0 (DS-7216/24/32HQHI-K2)



PoC
DS-7204HQHI-K1/P
 HD 1080p 1U Turbo HD PoC DVR

- 4-ch analog video input, 1-ch audio input
- HDTV/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 6-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 4 MP lite@15fps, 3 MP@15fps, 1080p@15fps
- HDMI and VGA output at up to 1920 x 1080p resolution
- 1 SATA X 10 TB; 2 × USB 2.0



PoC
DS-7208/16HQHI-K2/P
 HD 1080p 1U Turbo HD PoC DVR

- 8/16-ch analog video input, 1-ch audio input
- HDTV/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 12/24-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 4 MP lite@15fps, 3 MP@15fps, 1080p@15fps
- HDMI output at 4K resolution (DS-7216HQHI-K2/P)
- 2 SATA X 10 TB; 1 × USB 2.0, 1 × USB 3.0 (DS-7216HQHI-K2/P)



HOT
DS-7304/08/16/24/32HQHI-K4
 HD 1080p 1.5U Turbo HD DVR

- 4/8/16/24/32-ch analog video input, 4-ch audio input
- HDTV/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 6/12/24/48/48-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 4 MP lite@15fps, 3 MP@15fps, 1080p@15fps
- HDMI output at 4K resolution
- 4 SATA X 10 TB, 1 eSATA X 10 TB; 2 × USB 2.0; 1 × USB 3.0



DS-7204/08/16HGHI-F1
 720p 1U Turbo HD DVR

- 4/8/16-ch analog video input, 1-ch audio input
- HDTV/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 5/10/18-ch
- H.264/H.264+ video compression
- 1080p lite/@25fps (P)/30fps (N), 720p@25fps (P)/30fps (N)
- HDMI and VGA output at up to 1920 x 1080p resolution
- 1 SATA X 6TB; 2 × USB 2.0



DS-7208/16HGHI-F2
 720p 1U Turbo HD DVR

- 8/16-ch analog video input, 1-ch audio input
- HDTV/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 10/18-ch
- H.264/H.264+ video compression
- 1080p lite/@25fps (P)/30fps (N), 720p@25fps (P)/30fps (N)
- HDMI and VGA output at up to 1920 x 1080p resolution
- 2 SATA X 6TB; 2 × USB 2.0



DS-7208/16HGHI-F1/N
 720p 1U Turbo HD DVR

- 8/16-ch analog video input, 1-ch audio input
- HDTV/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 10/18-ch
- H.264/H.264+ video compression
- 1080p lite@12fps, 720p@12fps
- HDMI and VGA output at up to 1920 x 1080p resolution
- 1 SATA X 6TB; 2 × USB 2.0

PRODUCT FEATURES

Value Series



NEW
DS-7104/08HUHI-K1
 5 MP Mini 1U Turbo HD DVR

- 4/8-ch analog video input, 1-ch audio input
- HDTVI/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 8/16-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 8 MP@8fps (DS-7108HUHI-K1), 5 MP@12fps, 4 MP@15fps
- HDMI output at 4K resolution (DS-7108HUHI-K1)
- 1 SATA X 6TB; 2 × USB 2.0



HOT
DS-7104/08/16HQHI-K1
 HD 1080p Mini 1U Turbo HD DVR

- 4/8/16-ch analog video input, 1-ch audio input
- HDTVI/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 6/12/16-ch
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- 4 MP lite@15fps, 3 MP@15fps, 1080p@15fps
- HDMI output at 4K resolution (DS-7116HQHI-K1)
- 1 SATA X 6TB; 2 × USB 2.0



DS-7104/08/16HGHI-F1
 720p Mini 1U Turbo HD DVR

- 4/8/16-ch analog video input, 1-ch audio input
- HDTVI/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 4/8/16-ch
- H.264/H.264+ video compression
- 1080p lite/@25fps (P)/30fps (N), 720p@25fps (P)/30fps (N)
- HDMI and VGA output at up to 1920 x 1080p resolution
- 1 SATA X 6TB; 2 × USB 2.0




DS-7108HGHI-F1/N
 720p Mini 1U Turbo HD DVR

- 8/16-ch analog video input, 1-ch audio input
- HDTVI/AHD/CVI/CVBS/IP video signal supported, IP camera access up to 8/16-ch
- H.264/H.264+ video compression
- 1080p lite@12fps, 720p@12fps
- HDMI and VGA output at up to 1920 x 1080p resolution
- 1 SATA X 6TB; 2 × USB 2.0



4K AND H.265+,
A NEW REVOLUTION FOR THE ANALOG WORLD.
TURBO HD 4.0 SOLUTION

Distributed by



2018H2

HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Follow us on social media to get the latest product and solution information



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel

www.hikvision.com